


**FOR MORE INFORMATION VISIT:  
WWW.TKA-METALL.DE/SWING-GATE-SYSTEMS**

**OR SCAN THIS QR-CODE:**



**Tillmann & Köckmann  
GmbH & Co. KG**  
Specksloh 6  
59757 Arnsberg  
Germany  
Tel.: +49 29 32 / 89 48 6 - 10  
Fax: +49 29 32 / 89 48 6 - 29  
E-Mail: info@tka-metall.de  
Internet: www.tka-metall.de



 Visit us on Facebook


[www.facebook.com/tundka](http://www.facebook.com/tundka)

\* Examples for QR-Code-Readers:

i-nigma Reader for Blackberry, iPhone, Nokia, HTC  
scan for iPhone  
Barcode Scanner for Android

# DECORATIVE FENCING SWING GATES

1+2 WINGS

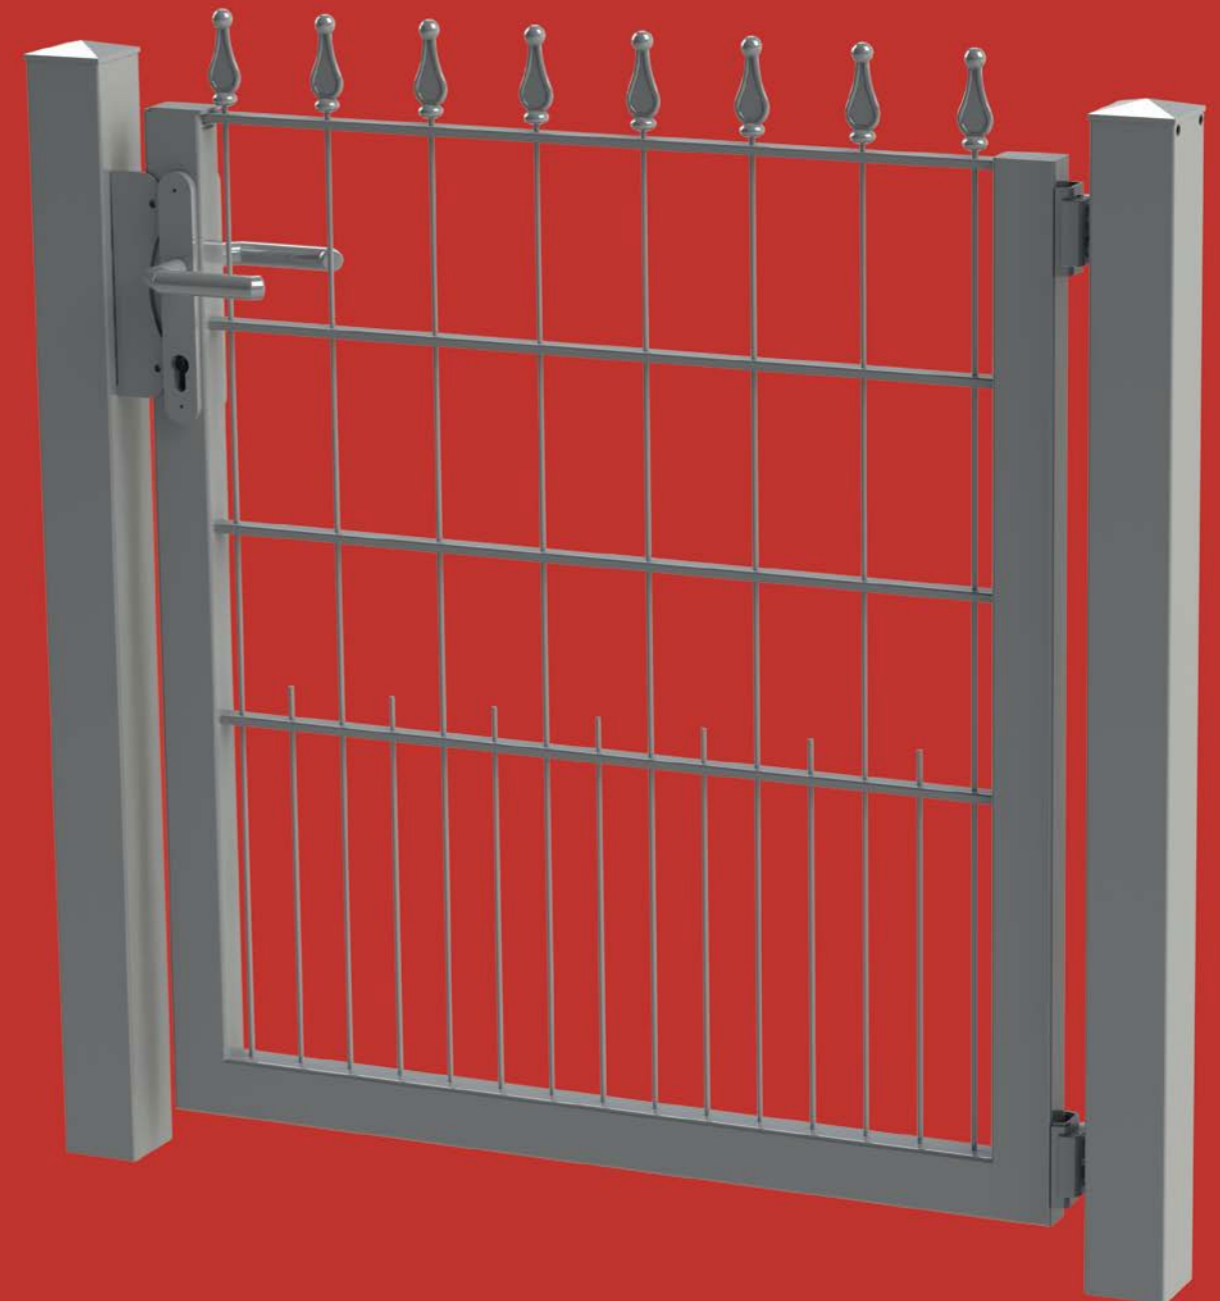

# DECORATIVE FENCING SWING GATES




|                      |  |
|----------------------|--|
| FRAME                | Rectangular steel tubes 60/40/2 mm - right/left and bottom   |
| POSTS                | Square steel tubes 80/80/2 mm - 100/100/3 mm   |
| INFILL               | Decorative fence panel* (please indicate type when ordering)   |
| FENCE CONNECTION     | Without, as an extra a fence connection strip with self-tapping screws can be ordered  |
| HINGES               | M16 threadable   |
| LOCKING SYSTEM       | Secure lock system prepared for profile cylinder, long aluminum back plate and set of handles                                    |
| SLAM PLATE           | Screwed  |
| OPENING DIRECTION    | Universal applicable (inside/outside + right/left), opening angle 180°   |
| HEIGHTS              | 800-1200 mm  |
| WIDTHS               | 1 wing: 1000/1250/1500/2000 mm<br>2 wings: 2000/3000/4000 mm   |
| CORROSION PROTECTION | By means of hot dipped galvanizing according to DIN EN ISO 1461 or additionally RAL color powder coating according to DIN 55633. |



The gate width is equal to the distance between the two gate posts - free passage.

To fix directly to the ground we offer a base plate solution.

## \* INFILLS FOR DECORATIVE FENCING SWING GATES

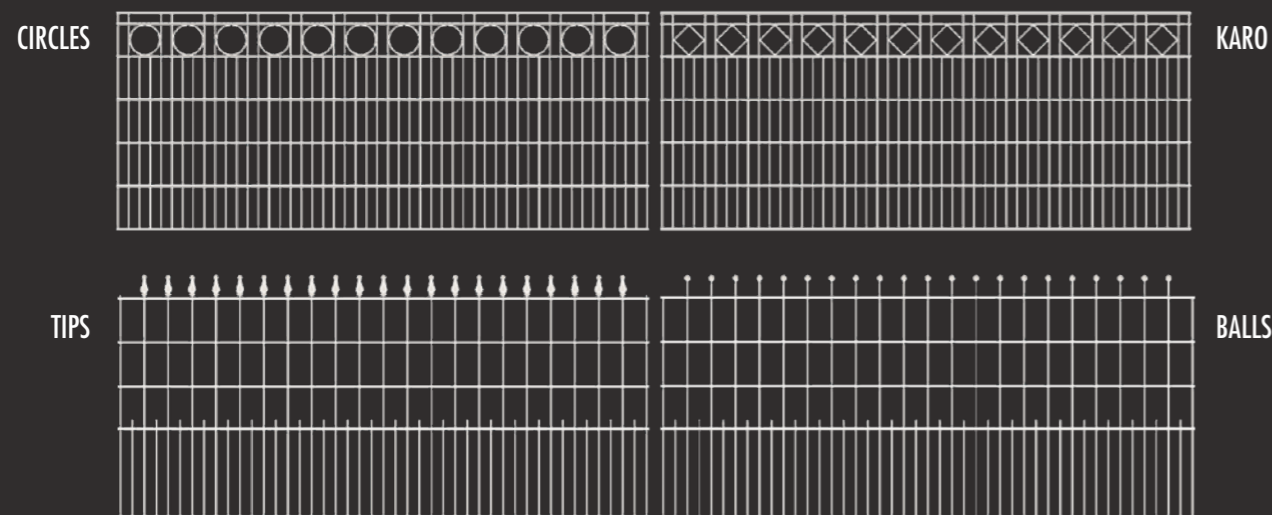

OUR PRODUCTS ARE AVAILABLE IN HOT DIPPED GALVANIZED OR POWDER COATED IN STANDARD COLORS GREEN RAL 6005, ANTHRACITE RAL 7016. OTHER RAL COLORS ON REQUEST.

Notes:  
All post profiles and foundation dimensions T&K.A. recommends comply with general structural requirements. They are not a substitute for the site-specific structural analysis as specified by construction supervision. This is to be provided by the customer.

All goods declared by us as hot dipped galvanized are hot dipped galvanized according to DIN EN ISO 1461. This procedure protects all metal components against corrosion. The formation of white rust cannot basically be prevented. It is a powdery, water-soluble product of zinc corrosion formed from zinc hydroxide and zinc oxide. This is not a quality defect and with the formation of the zinc patina layer, this occurrence disappears completely. Minor surface irregularities and zinc discharge points are production-determined features and are evidence of hot dipped galvanizing (source: Zinkberatung e.V., [the German zinc consultative body] Düsseldorf).

Technical details are subject to change. Custom-made products, other RAL colors and dimensions on request.

By using our modern tube laser system, we can offer you exceptional solutions for any demand you may have. Please contact us!

