


FOR MORE INFORMATION VISIT:
WWW.TKA-METALL.DE/SWING-GATE-SYSTEMS

OR SCAN THIS QR-CODE:



Tillmann & Köckmann
GmbH & Co. KG
Specksloh 6
59757 Arnsberg
Germany
Tel.: 0 29 32 / 89 48 6 - 10
Fax: 0 29 32 / 89 48 6 - 29
E-Mail: info@tka-metall.de
Internet: www.tka-metall.de



 Visit us on Facebook


www.facebook.com/tundka

* Examples for QR-Code-Readers:

i-nigma Reader for Blackberry, iPhone, Nokia, HTC
scan for iPhone
Barcode Scanner for Android

MULTIFLEX SWING GATE

1 + 2 WINGS WITH WELD MESH PANEL INFILL

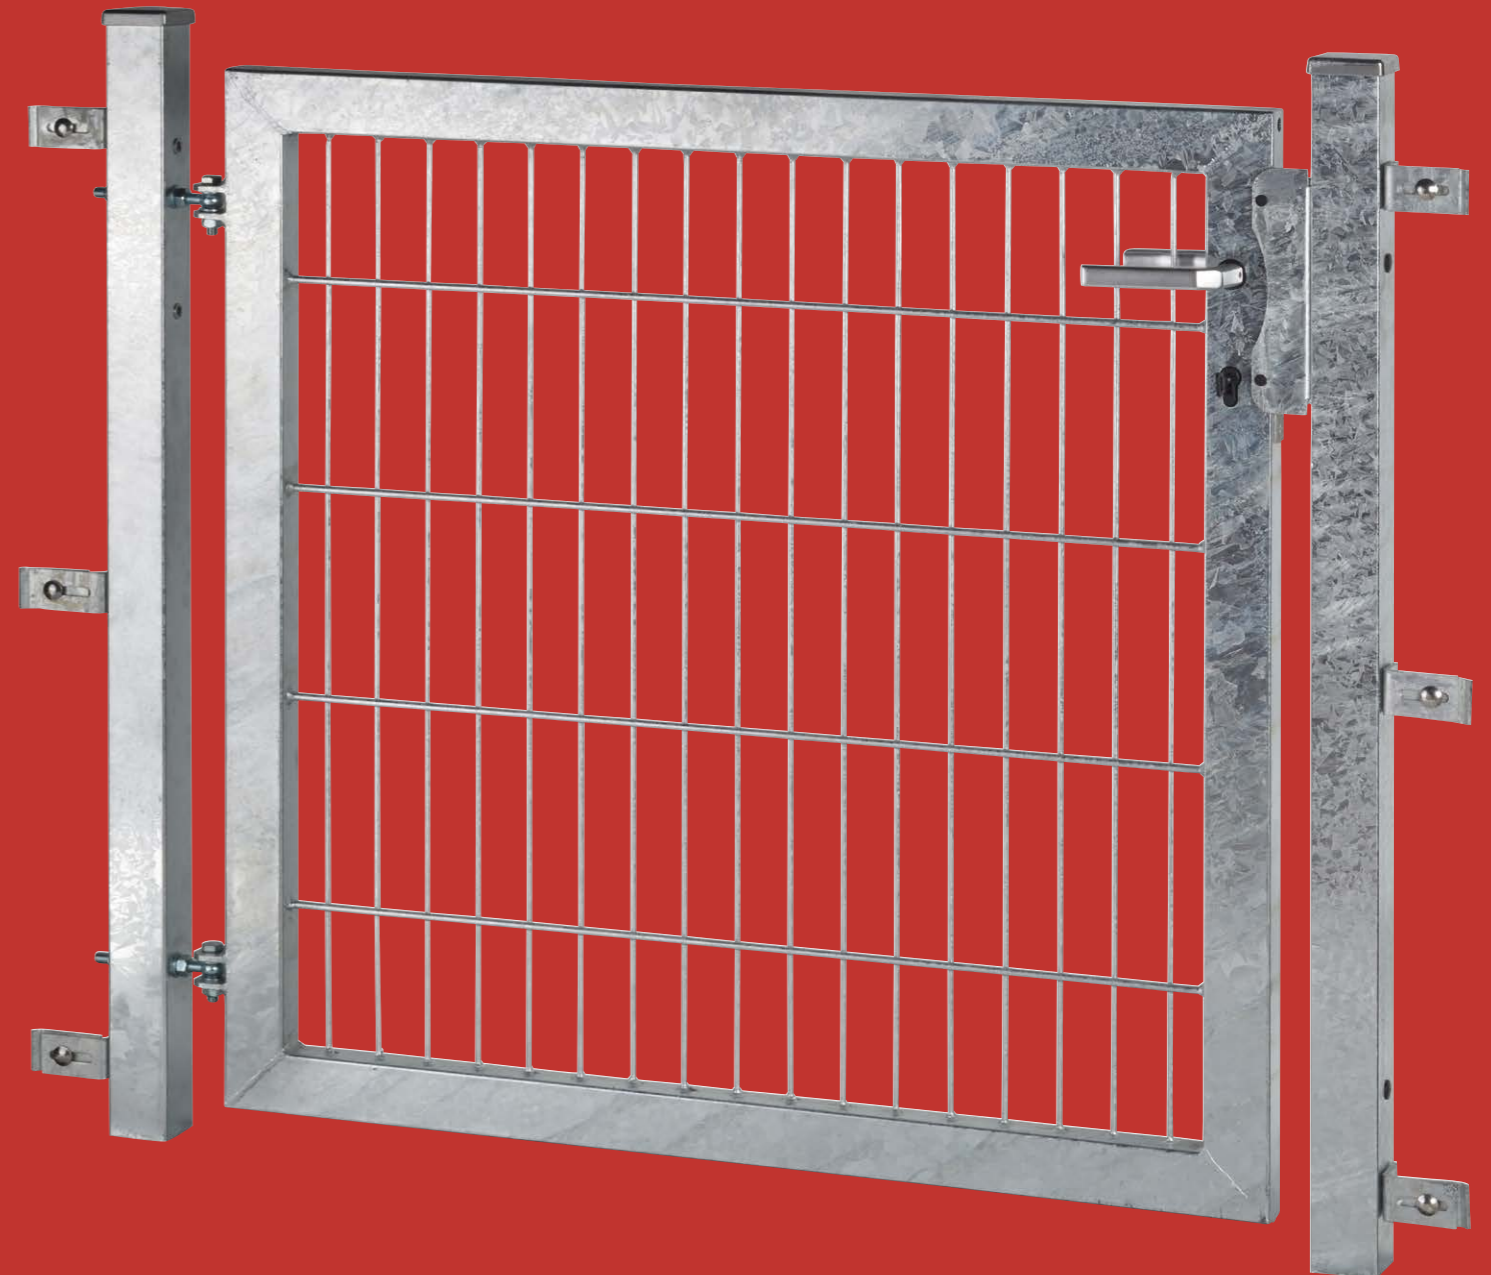

MULTIFLEX SWING GATE



With the new swing gate type T&K.A "Multiflex" we offer a high-quality 1- and 2-wing swing gate system at reasonable prices. The swing gate can easily be assembled by the customer according to his individual needs.

Eye bolts as hinges and a screwed on slam plate offer the flexibility to set the opening direction directly at site - according to the customers' wishes. By using fence connec-

tion brackets various fencing systems can be fixed to the gate posts.

We gain the necessary transverse and torsional stability by using a circumferential frame out of rectangular tubes (60/40 mm) with welded mesh panel infill - mesh size 50 x 200 mm. The panel is completely welded into the frame.

FRAME	Circumferential rectangular steel tubes 60/40/2 mm
POSTS	Square steel tubes 60/60/2 - 80/80/2 mm, (always 750 mm longer as gate height)
INFILL	Weld mesh panel 8/6 mm, mesh size 50/200 mm
FENCE CONNECTION	Small fence connection brackets, parts supplied loose, incl. screws.
HINGES	M12 eye bolts
LOCKING SYSTEM	secure lock system with PVC tumbler lock insert, prepared for profile cylinder set of ALU handles
SLAM PLATE	Screwed
OPENING DIRECTION	Universal applicable (inside/outside + right/left) - opening angle 105°
HEIGHTS	800 - 2000 mm
WIDTHS	1-wing: 1080 / 1550 / 2020 mm 2-wings: 3065 / 4015 mm
CORROSION PROTECTION	Hot dipped galvanizing according to DIN EN ISO 1461 or additionally RAL color powder coating according to DIN 55633

The gate width is equal to the distance between the two gate posts - free passage.

Gate width 1080 mm = available from stock only in hot dipped galvanized or RAL 6005 and RAL 7016. Other colors and other gate width are always make to order/lead time.

Over climbing protection/dental strip on top of wing available on request. For gates from stock only screw on solution is available.

For direct fixation on the ground we offer a base plate solution.

OUR PRODUCTS ARE AVAILABLE IN HOT DIPPED GALVANIZED OR POWDER COATED IN STANDARD COLORS GREEN RAL 6005, ANTHRACITE RAL 7016. OTHER RAL COLORS ON REQUEST.

Notes:
All post profiles and foundation dimensions T&K.A. recommends comply with general structural requirements. They are not a substitute for the site-specific structural analysis as specified by construction supervision. This is to be provided by the customer.

All goods declared by us as hot dipped galvanized are hot dipped galvanized according to DIN EN ISO 1461. This procedure protects all metal components against corrosion. The formation of white rust cannot basically be prevented. It is a powdery, water-soluble product of zinc corrosion formed from zinc hydroxide and zinc oxide. This is not a quality defect and with the formation of the zinc patina layer, this occurrence disappears completely. Minor surface irregularities and zinc discharge points are production-determined features and are evidence of hot dipped galvanizing (source: Zinkberatung e.V., [the German zinc consultative body] Düsseldorf).

Technical details are subject to change. Custom-made products, other RAL colors and dimensions on request.

By using our modern tube laser system, we can offer you exceptional solutions for any demand you may have. Please contact us!

